

A better point of view



come

and

see



TX-20

Full Auto Tonometer

TX-20P

FULL AUTO TONOMETER & PACHYMETER

Canon

- Compact and sleek instrument
Fits easily on any instrument table and allows for maximum patient interaction



TX-20
Full Auto Tonometer

TX-20P
Full Auto Tonometer & Pachymeter

Accurate, automatic and fast measurement at the push of a button

Due to its intelligent full 3D alignment functionality, the TX-20/P can start a complete examination with only a basic alignment on one eye. With a simple push of the button, the TX-20/P conducts automatic examination of both eyes from alignment to printing.



TX-20 AND TX-20P

2 instruments, sharing the same advanced features

The advanced intelligent 3D fully automated operation makes operating the instrument extremely simple; just press the button. The TX-20/P will align and measure extremely fast, even the print-out and paper cut off are done automatically, reducing examination time.

The instrument's soft air puff and short examination time of the TX-20/P contribute to enhanced patient comfort.

The TX-20P model additionally has a built-in pachymeter, for measuring the central corneal thickness (CCT).



EXCELLENT ERGONOMICS

The tilting 5.7" colour LCD screen makes it possible to operate the TX-20/P while standing or sitting



MULTIFUNCTIONAL JOYSTICK


Powered for extremely comfortable operation, all main functions are centralized in the joystick, allowing for the instrument to be operated by one hand.



FAST BUILT-IN PRINTER


Printer with easy drop-in paper loading and auto cutter. Comprehensive print-out with all relevant data



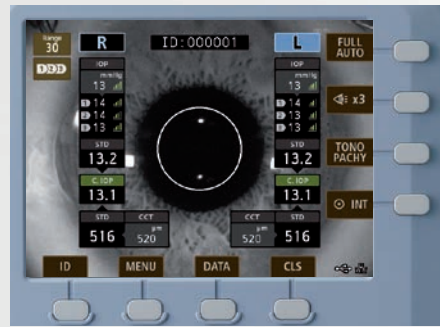

Multifunctional switches

placed around the screen with a simple and logical function indication.

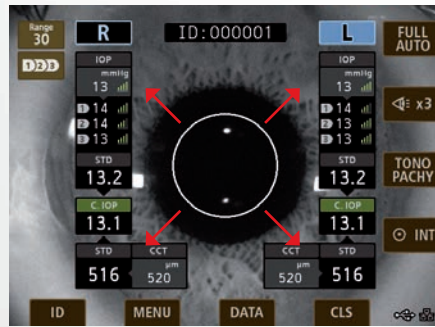

Limiter function

A safety feature that prevents that the optical head makes physical contact with the patient's eye.



Extended connectivity

USB host for inputting patient info by keyboard/barcode reader. LAN and RS-232C for connection to network. XML file output via LAN.



External Fixation

Besides the internal fixation light, the instrument is equipped with 2 external fixation lights. Effective for patients with a central vision defect.

Upper IOP Warning
Lower IOP Warning


Upper and lower IOP warnings

To assist during screening; threshold values can be changed to your requirements.



Warning images


When there is a measurement error, a snapshot of the examinee's eye is displayed to indicate the possible cause of the error: obstruction by an eyelid or eyelashes. The TX-20P additionally has a Pachymeter measurement error screen.

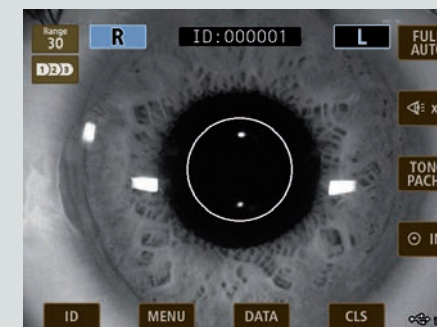

Large magnification of the pupil for easy observation



Settings of the device can be adjusted to your preference

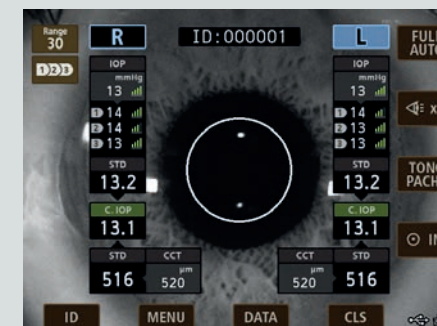

All measurement results are clearly displayed in one screen




TX-20P

Two in one, tonometer and pachymeter in a single instrument.

PACHYMETER

Central corneal thickness measurement based on cross-sectional image of the slit image of the cornea.

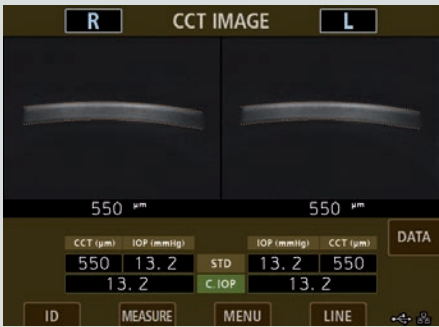

Measure intraocular pressure (IOP) and central corneal thickness (CCT) together as well as automatically recalculate the compensated IOP with accuracy and speed. All in a single instrument.

Information about the actual corneal thickness is important because without it can mask accurate readings of IOP and delay diagnosis of glaucoma. Unless taken into account, thicker corneas contribute to overestimation of IOP values and thinner corneas to underestimation.

With the built-in pachymeter the TX-20P is much more than just a tonometer. It reduces the risk of misreading intraocular pressure and is set to make a significant contribution to detecting potential glaucoma in patients.



Compensated IOP
Automatic calculation of C.IOP based on the CCT value

| Example | IOP (mmHg) | CCT (mm) |
|---------|------------|----------|
| STD | 12.9 | 531 |
| C. IOP | 13.9 | |

Parameter setting for Compensated IOP
Use default settings or adjust the compensated IOP to your preference

| |
|----------------|
| C. IOP Param A |
| C. IOP Param B |

Specifications TX-20 / TX-20P

| | | |
|----------------------|--|--|
| Dimensions | 260 W x 490 L x 500 H mm | Intra ocular pressure measurements |
| Weight | 15 kg | Measurement principle Air puff non-contact method |
| Display | Tilting 5,7 inch LCD screen | Measurement range 0 - 60 mmHg Auto switching 30/60 mmHg range |
| Printer | Thermal Line Printer with auto cutter | Measurement units mmHg/hPa |
| Chinrest | Motorized | Working Distance 11 mm |
| Interface | USB host/ RS232C / LAN | |
| Power | AC 100 V to 240 V, 50/60 Hz, 0.8 A to 0.4 A | Pachymeter Measurements (TX-20P only) |
| Power Saving mode | YES | Measurement principle Quantized slit image on central cornea |
| Optional accessories | Chin rest paper, printing paper | Measurement range 15 - 1300 microns |
| Fixation light | Internal or external | Light source Blue LED |
| Input ID Options | Automatic serial number assignment or patient ID input via screen, numeric keyboard, barcode reader (optional) | |
| Alignment | Fully automatic 3D alignment | |
| Measurement mode | Fully automatic / automatic / manual | |

•

Canon has been defining the future with innovative solutions for more than 75 years. In all that time we've constantly strived to improve medical diagnostics in healthcare. Perhaps that's what made us a leading global provider of eye care solutions.



Canon Eco

Our actions are based on honesty and sustainability.



Canon Quality

Safety and quality are an integral component of our actions.



Canon Versatility

Everything we do has to have a significant customer benefit.